
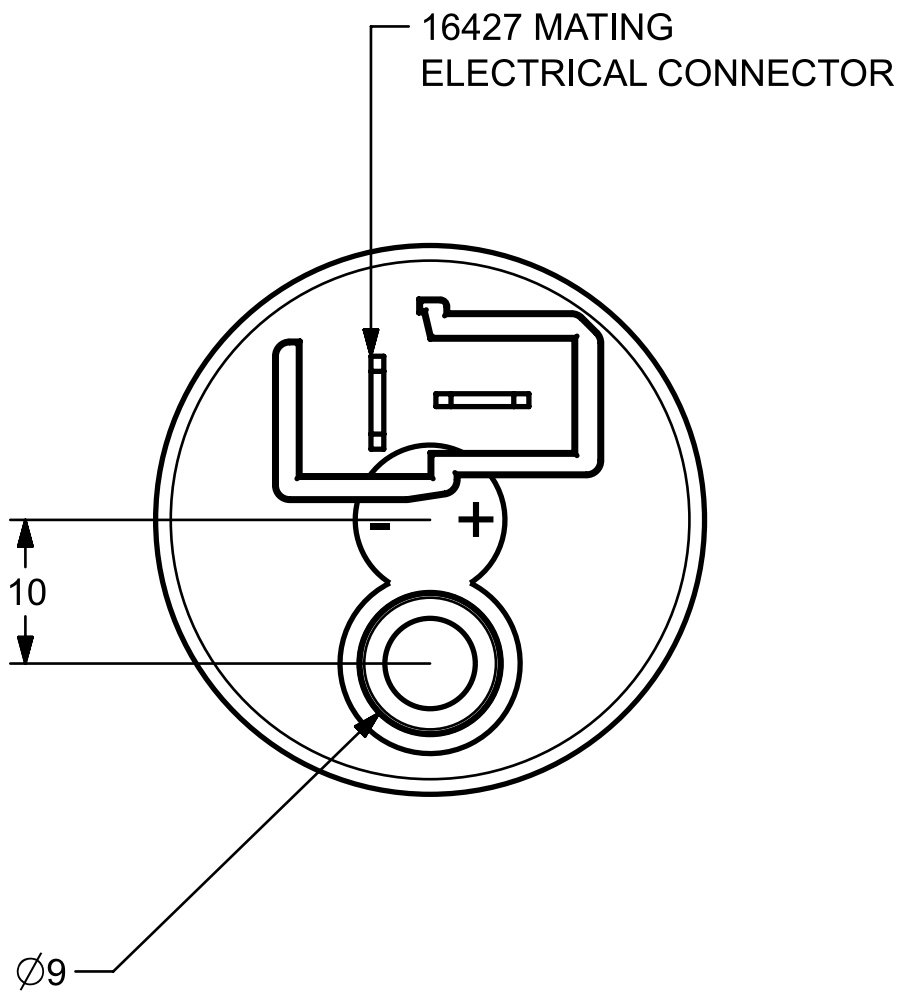
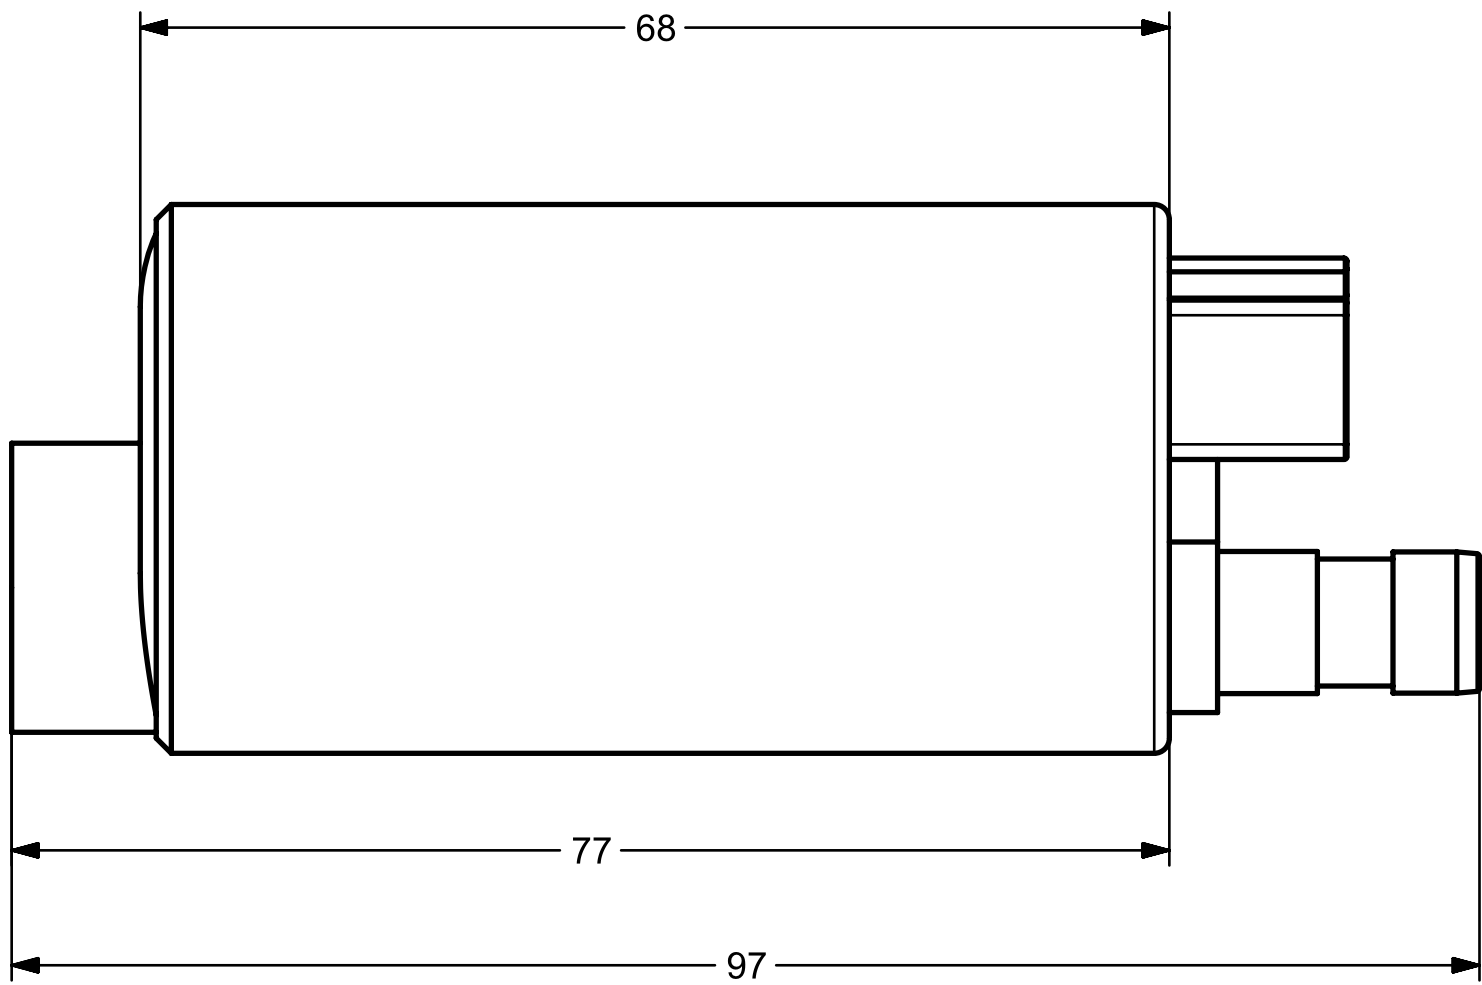


NOTES:

- 1. MIN VOLTAGE OF 6V
- 2. MAX PRESSURE OF 2 PSI
- 3. INLET DIAMETER OF 19MM
- 4. OUTLET DIAMETER OF 8MM


PRESSURE (PSI)	Ltr/Hr	US Gal/Hr	AMP
3	150	37	1.6

ASNU FLOWRITE TEST FLUID, RELATIVE DENSITY: 0.701 - 0.781
TESTED @13.8VDC

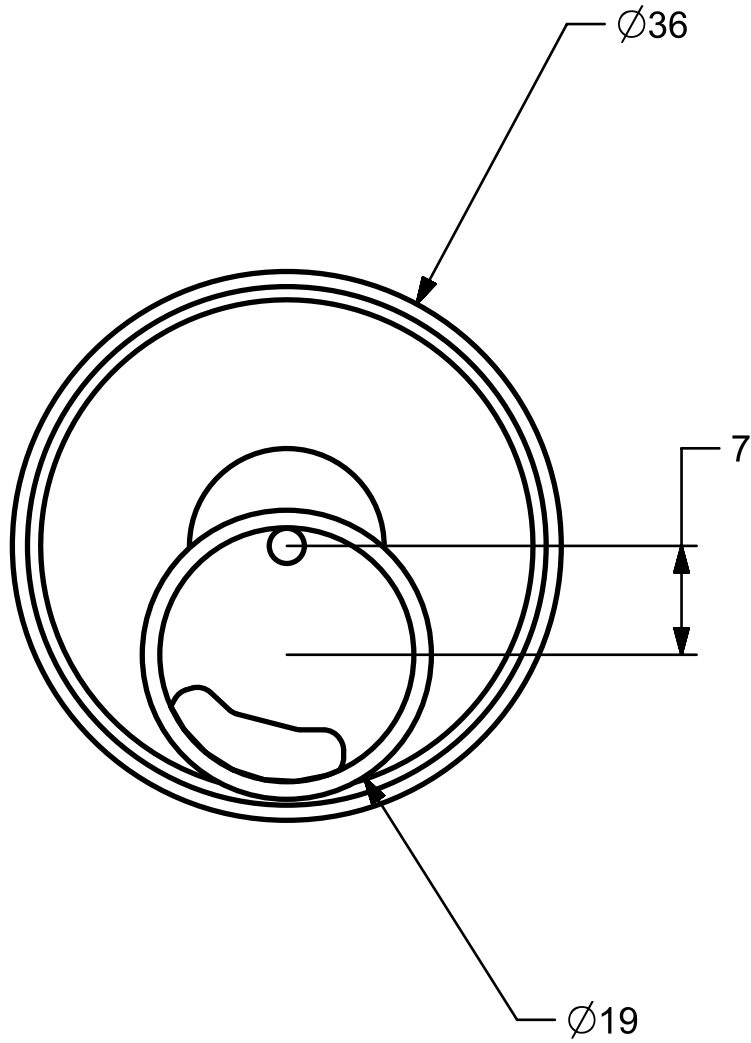

REV	DESCRIPTION

RADIUS: 0.2MM UNLESS OTHERWISE STATED
CHAMFER: 0.2 X 45° UNLESS OTHERWISE STATED
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES
TOLERANCES:
LINEAR: ±0.1MM
ANGULAR: ±0.5°
DEBUR AND BREAK SHARP EDGES
PLEASE INFROM DRAWING OFFICE OF ANY ERRORS DO NOT SCALE DRAWING - IF IN DOUBT ASK

THE DOCUMENT AND THE COPYRIGHT HEREIN ARE CONFIDENTIAL AND THE PROPERTY OF PROTEC FUEL SYSTEMS LTD. AND MUST NOT BE COPIED OR DISCLOSED TO ANY THIRD PARTY IN SUCH A MANNER AND HAVE SUCH PURPOSE AS ARE AUTHORISED IN WRITING BY PROTEC FUEL SYSTEMS LTD.			
TITLE 11818 LPVW LIFT PUMP DATA SHEET			
	MATERIAL ALUMINIUM 6082	DRAWING NUMBER 24-10-903000	REVISION 1
	FINISH BLACK ANODISED (MIL-A-8625, TYPE II)		
	THIRD ANGLE PROJECTION	SCALE: 2:1	SHEET 1 OF 1