


GO7

AIR
JACKS



CP3985
 CP3985 is an air jack that has a compression spring rather than the conventional tension return spring. This makes the air jack faster and more efficient in operation. Aluminium foot.

Code	Note	Lift capability	Diameter	Stroke	Height	Integrated venting	Operating pressure (max)	Weight
CP3985-150	-	675 Kg	60 mm	150 mm	224 mm	no	30 Bar	0,83 Kg
CP3985-150EV	-	675 Kg	60 mm	150 mm	224 mm	yes	30 Bar	0,88 Kg
CP3985-230	-	675 Kg	60 mm	230 mm	325 mm	no	30 Bar	1,07 Kg
CP3985-230EV	-	675 Kg	60 mm	230 mm	325 mm	yes	30 Bar	1,12 Kg
CP3985-310	-	675 Kg	60 mm	310 mm	425 mm	no	30 Bar	1,34 Kg
CP3985-310EV	-	675 Kg	60 mm	310 mm	425 mm	yes	30 Bar	1,39 Kg
CP3945-230	Heavy duty	675 Kg	60 mm	230 mm	325 mm	no	30 Bar	1,07 Kg
CP3945-230EV	Heavy duty	675 Kg	60 mm	230 mm	325 mm	yes	30 Bar	1,12 Kg
CP3945-310	Heavy duty	675 Kg	60 mm	310 mm	425 mm	no	30 Bar	1,34 Kg
CP3945-310EV	Heavy duty	675 Kg	60 mm	310 mm	425 mm	yes	30 Bar	1,39 Kg

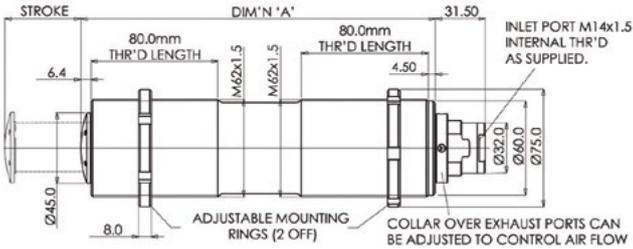

Kit guarnizioni

Code	To suit:
CP2985-1RK	CP2985
CP3985-11RK	CP3945
CP3985-1RK	CP3985

Soon available online the new air jacks by **GOODRIDGE**

G-LIFT ULTRA

G-Lift Ultra is an high performance air jack that is lightweight, high-strength and springless. It has been designed to meet the exacting standards and demanding conditions of the racing industry.

'Redefining the Racing industry standard'

The G-Lift Ultra is designed for racing applications. It has lightweight, high-strength components made from aerospace-grade aluminium alloy.

Our innovative air jacks greatly improve the speed, safety and efficiency of every pit stop. Each lift is stable, consistent and reliable every time.

Each air jack includes a location nut for adjustability, a lock nut to prevent the location nut from becoming loose and an installation tool for mounting to the vehicle's chassis. The foot can also be replaced when worn.

Available in 50mm and 60mm Diameter
 Stroke Lengths
 185mm
 210 mm
 230mm
 280mm



Locknut to prevent loosening

Adjustable location nut

- Light weight
- Springless
- High Strength

Reliability and consistency lift after lift

Replaceable foot

Please contact us for more information.

UK
 +44 (0) 1392 369090
 email: uk@goodridge.com

USA
 +1(704) 662 9095
 email: us@goodridge.com

GERMANY
 +49 (0) 7222 967553-0
 email: de@goodridge.com

SPAIN
 +34 (96) 252 4693
 email: es@goodridge.com

ITALY
 +39 0131 216505
 email: it@goodridge.com

FRANCE
 +33 (1) 64 38 44 44
 email: fr@goodridge.com

NETHERLANDS
 +31 (15) 256 5232
 email: nl@goodridge.com

JAPAN
 +81 (0) 47-710-7911
 email: jp@goodridge.com

GOODRIDGE
G-LIFT ULTRA
G-LANCE ULTRA



Subscribe to newsletter!

Scan the QR code with your smartphone to stay informed about this and other news and take advantage of new offers.

LANCES, VALVES & COUPLERS

STÄUBLI
Lances, valves & couplers



Code	Description
JAC06.1102	Airjack lance

STÄUBLI
Lances, valves & couplers



Code	Description
JAC06.1102/MSW	Swivel version JAC lance

SOBEK
Lances, valves & couplers

The air lance Type 60, the handle, is connected to an air bottle. It is ergonomically optimized and designed for one-handed operation. It makes it easy to attach the lance to the ERGOVENT even at high operating pressures up to 30 bar. The special coupling system works almost maintenance-free. Weight: 565 g



Code	Description
ZV9000-0011	Airjack lance

AP
Lances, valves & couplers




Code	Description
CP6116-15	Airjack lance

AP
Lances, valves & couplers




Code	Description
CP6116-4	Airjack coupling

STÄUBLI
Lances, valves & couplers



Code	Description
JAC06.5655	JAC valved safety plug

STÄUBLI
Lances, valves & couplers



Code	Description
JAC06.4655	JAC plug with integrated venting

SOBEK
Lances, valves & couplers

The ERGOVENT, mounted on the vehicle side, is a lightweight valve system to control the pressure in the pneumatic lifting system. The cone-shaped nipple makes it easier to attach the air lance. Once the connection is made, the Air Jack System takes up the air. After disconnecting the Air Lance, the ERGOVENT safely closes up the system. A slight lifting of the ergonomically shaped two-finger grip bleeds the air from the system. Weight: 115 g




Code	Description
ZV9000-0003	Standard receiver nipple

AP
Lances, valves & couplers



Code	Description
CP6116-3	Airjack coupling with valve

STÄUBLI
Lances, valves & couplers

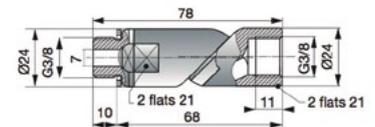

Code	Description
MSW075202	Swivel alone

PROP ASSY

AP
CP3985

CP3985 props have a one piece billet machined aluminium body with a stainless steel handle (where specified) and an anodised surface finish for durability. Handle fitted to all props except CP3985-15. View customer drawing



Code	To suit:
CP3985-15	CP3985-150EV
CP3985-23	CP3985-230EV
CP3985-31	CP3985-310EV

GOODRIDGE

Discover the new G-LANCE ULTRA.
Soon online at giefferacing.com!



Subscribe to newsletter!

Scan the QR code with your smartphone to stay informed about this and other news and take advantage of new offers.

